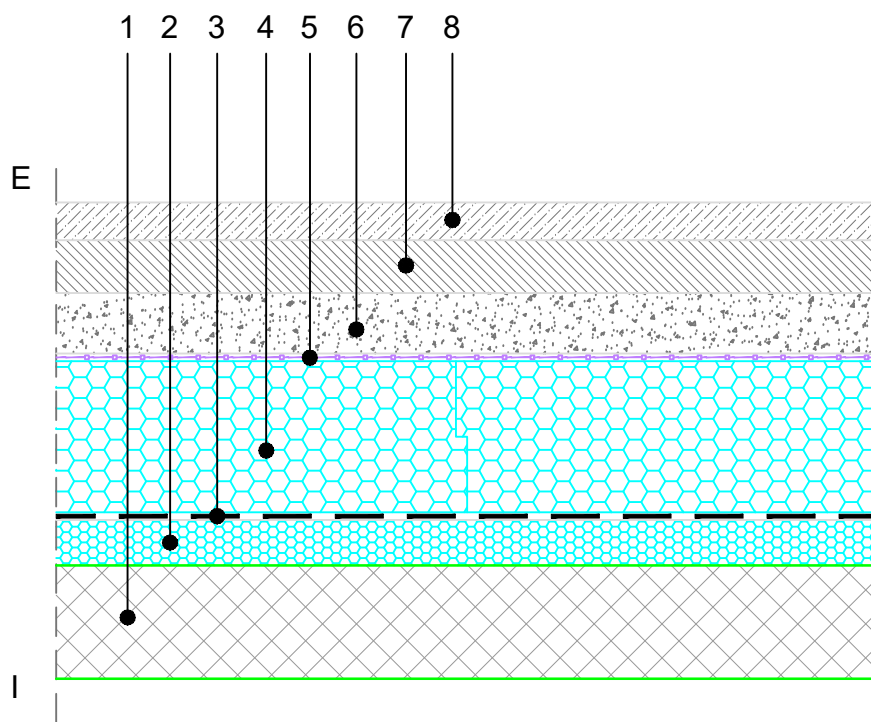


INVERTED FLAT ROOF
DRIVABLE ROOF
PARKING ASPHALT DECK
CROSS SECTION, SCALE 1:10

10.09.2.00

COMPOSITION of system solution (dimensions in detail to be calculated):

1. REINFORCED CONCRETE SLAB
2. FIBRAN xps INCLINE – tapered insulation
3. WATERPROOFING
4. FIBRAN xps 500-L
5. FIBRAN $filter$ SF32 – drainage PP fleece
6. SAND UNDERLAY
7. BASE COURSE
8. WEARING COURSE

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.
- Inclination to be executed per project
- all dimensions to be calculated in accordance with static and building physics