


INVERTED FLAT ROOF
 DRIVABLE ROOF
 PARKING ASPHALT DECK
 LINEAR GULLY, SCALE 1:5

10.09.2.04

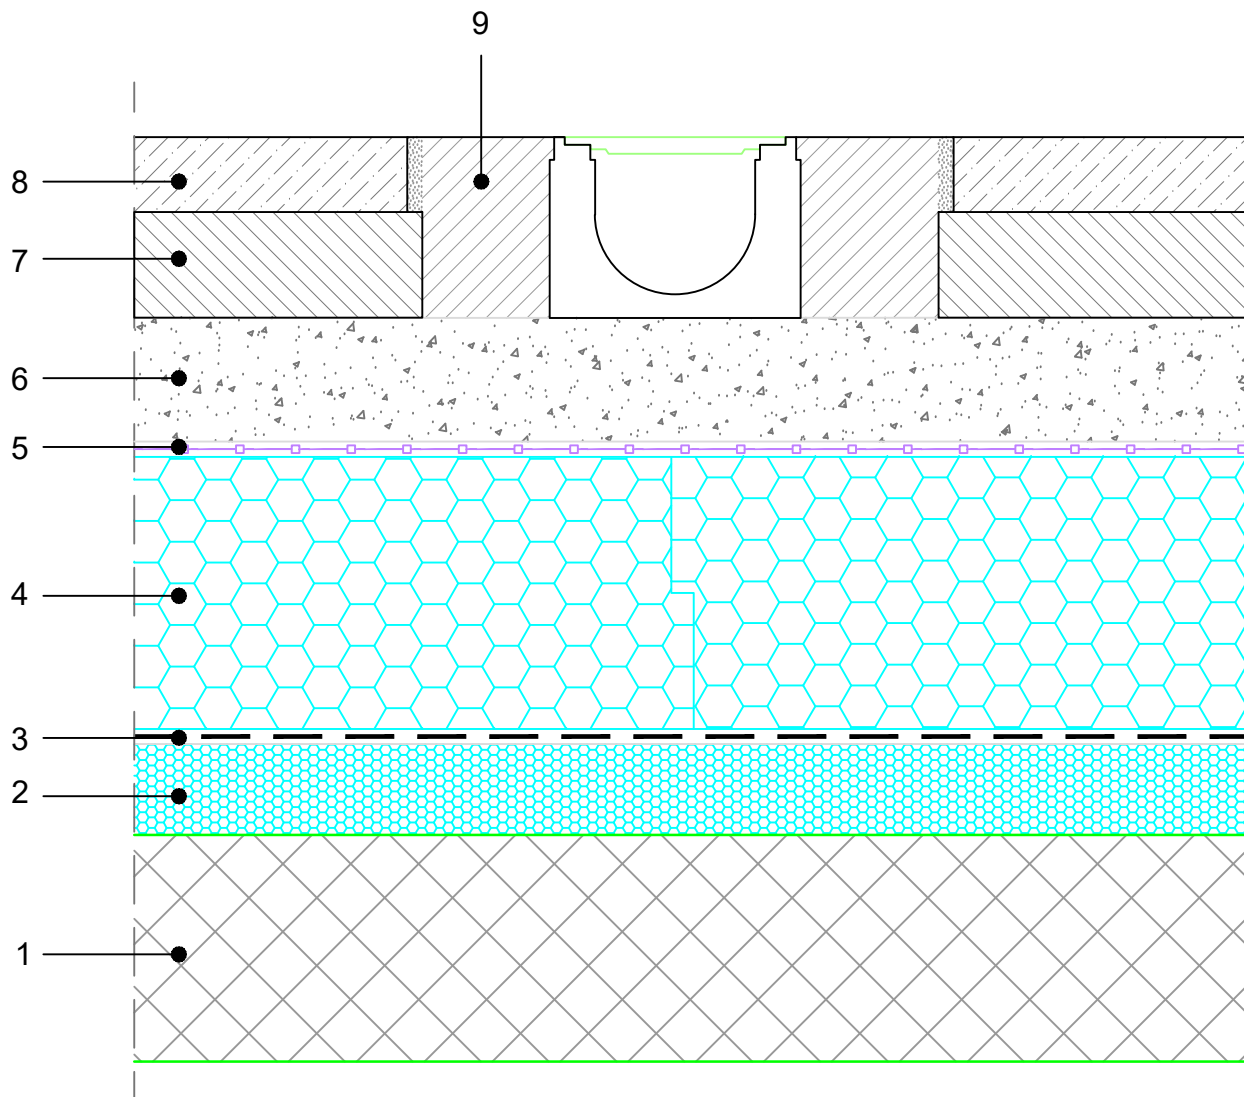

COMPOSITION of system solution (dimensions in detail to be calculated):

1. REINFORCED CONCRETE SLAB
2. FIBRAN *xps* INCLINE – tapered insulation
3. WATERPROOFING
4. FIBRAN *xps* 300-L
5. FIBRAN *filter* SF32 – drainage PP fleece
6. SAND UNDERLAY
7. BASE COURSE
8. WEARING COURSE
9. CONCRETE

NOTE:

- It is not allowed to work with an open flame in the close proximity of the XPS insulation.
- When choosing type of waterproofing, it is necessary to take into account that chlorides of PVC membrane have neg. affect on XPS.
- Inclination to be executed per project.
- all dimensions to be calculated in accordance with static and building physics